


Full Gigabit Industrial PoE Switch

Model: PS1802SFG-I

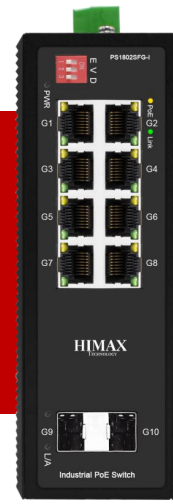

Product Introduction

The PS1802SFG-I is full gigabit industrial PoE fiber switch which has 8*10/100/1000Base-T POE ports and 2*1000Base-X uplink SFP slot ports. Port 1-8 can support IEEE 802.3af/at PoE standard, single-port PoE power up to 30W, and the maximum PoE output power of the host is 120W(at-240W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal device such as wireless AP, IP camera, industrial sensor through the network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, sea transportation. Industrial scenes such as metallurgy and green energy construction form a cost-effective, stable and reliable communication network.

Features

- ◎ 8*10/100/1000M POE+ 2*/100/1000M SFP fiber Port Industrial PoE Switch,1-8 ports support IEEE 802.3af/at;
- ◎ PoE port support AF/AT intelligent recognition. Standard power is 15.4W/port, Maximum power: 30W/port;
- ◎ Only support 1,2(+)/3,6(-);
- ◎ Operation TEMP:-40~85°C
- ◎ Input voltage: DC48-57V, Redundant dual power 5-bit industrial terminals;
- ◎ IP protection level: IP40; Rail-type installation;
- ◎ 5 years warranty.

Specification

Model		PS1802SFG-I
Interfaces		
Interface	8*10/100/1000Base-T PoE ports (Data/Power) 2*1000Base-X uplink SFP fiber slot ports (Data) 2 set of V+, V- redundant DC power interface (5 Pin Phoenix terminal)	
PoE		
PoE Port	Port 1-8 supports POE @ IEEE802.3af/at	
Network Protocol	IEEE802.3 10BASE-T IEEE802.3u 100BASE-T/TX IEEE802.3ab 1000BASE-T IEEE802.3z 1000BASE-X IEEE802.3u 100BASE-FX IEEE802.3x	
PoE Standard	IEEE802.3af/at	
SFP Port Characteristic	Gigabit SFP optical fiber interface, default matching optical modules, need to buy separately, (optional order mode / multi-mode, single fiber / double fiber optical module	
Forwarding Mode	Store and Forward	
Switch Property		
Switching Capacity	20Gbps	
Forwarding Rate@64byte	14.88Mpps	
MAC	8K	
Buffer Memory	2M	
Jumbo Frame	10K	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-T: Cat5e or later UTP (≤100 meter)	
Optical Cable	Multimode: 850nm 0 ~ 500M, 1310nm 0~2KM; Single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.	
Power Supply Pin	Default 1/2 (+), 3/6 (-)	
Working Voltage	48-57VDC; 5 Pin industrial Phoenix terminal, support anti-reverse protection.	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	240W (48-57VDC)	
Power Consumption	Standby:<3W; Full load:<120W	
Physical Characteristics		

LED Indicator	Power indicator: PWR (Green); Network indicator: 1-8(Link/Act)/ (Green),9(Link/Act)/ (Green); POE indicator: PoE (Orange)
Power Supply	No, optional 48V/120W or 48V/240W industrial power supply
Operation TEMP / Humidity	-40~+85°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+125°C;5%~95% RH Non condensing
Dimension	165*148*52mm
Net /Gross Weight	<1.0kg / <1.3 kg
Lightning protection / protection level	<p>Lightning protection: 6KV 8/20us; Protection level: IP40</p> <p>IEC61000-4-2(ESD): ±8kV contact discharge, ±15kV air discharge</p> <p>IEC61000-4-3(RS):10V/m(80~1000MHz)</p> <p>IEC61000-4-4(EFT): power cable: ±4kV; data cable: ±2kV</p> <p>IEC61000-4-5(Surge): power cable:CM±4kV/DM±2kV; data cable: ±4kV</p> <p>IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz)</p> <p>IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s</p> <p>IEC61000-4-9(pulsed magnet field):1000A/m</p> <p>IEC61000-4-10(damped oscillation):30A/m 1MHz</p> <p>IEC61000-4-12/18(shockwave):CM 2.5kV, DM 1kV</p> <p>IEC61000-4-16(common-mode transmission):30V; 300V,1s</p> <p>FCC Part 15/CISPR22(EN55022): Class A</p> <p>IEC61000-6-2(Common Industrial Standard)</p>
Warranty	5 years
Certification	
Certification	CE, FCC, RoHS,
Package Contents	
Switch	
DIN-Rail mounting accessories	
Quick installation guide	

HIMAX



HIMAX TECHNOLOGY LIMITED

www.himax-technology.com

Email: sales@himax-technology.com

F10, Fuhong Building, No.120 Yongfu Road, Qiaotou Community Fuhai Street, BaoanDistrict, Shenzhen China



Company Website